



Holy Enterprise Limited

FL.2, No.12 North Ave.1, Industrial Rd. East, Gusan, Guzhen, Zhongshan, Guangdong, China

Specification

6FM-55DC 12V55AH/20HR





Cells Per Unit	6
Voltage Per Unit	12
Capacity	55AH@20hr-rate to 1.8V per cell @ 25°C
Weight	Approx.17.5kg (Tolerance±3%)
Max. Discharge Current	500 A(5sec)
Internal Resistance	Approx 7.5 mΩ
Operating Temperature Range	Discharge: -20°C~50°C Charge: 0°C~40°C Storage: -20°C~50°C
Normal Operating Temperature	25±3°C
Float Charging Voltage	2.25 to 2.27 VDC/unit Average at 25°C
Maximum Charging Current	16.5A
Equalization and Cycle service	2.35 to 2.40 VDC /unit Average at 25°C
Terminal	Terminal: NB/B



Application

Uninterruptible Power System;
Communication Equipments;
Solar Power Systems;
Solar Power Street Light;
Wind Power Systems

Dimension: 229(L) ×138 (W) ×208 (H) (Total 212/227 mm)

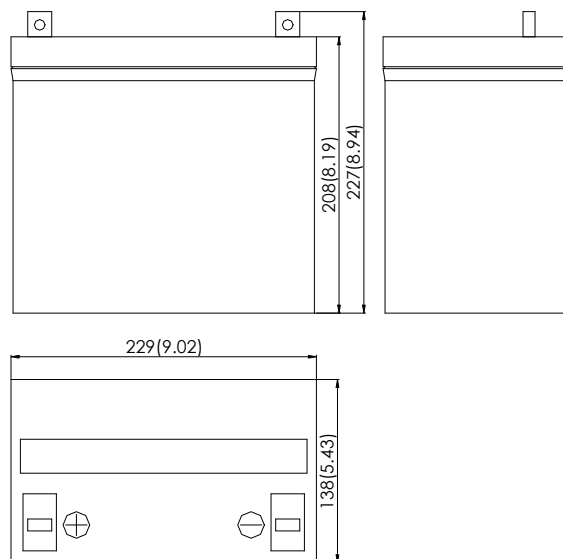

Constant Current Discharge Characteristics: A(25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.80V/cell	140.7	104.8	89.5	60.7	34.10	20.52	14.14	11.72	9.87	6.747	5.109	2.586
1.75V/cell	155.9	114.9	97.1	61.7	34.93	20.90	14.54	12.00	10.05	6.861	5.165	2.643
1.70V/cell	173.7	124.5	102.0	62.2	35.26	21.06	14.59	12.12	10.17	6.919	5.221	2.699
1.65V/cell	179.0	129.1	103.6	63.3	35.59	21.22	14.71	12.17	10.24	6.976	5.277	2.756
1.60V/cell	184.3	135.7	105.8	64.5	35.75	21.38	14.76	12.23	10.30	7.033	5.333	2.813

Constant Power Discharge Characteristics: W/Unit(25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.80V/cell	1562	1171	989	693.2	397.8	244.2	169.6	140.6	118.5	80.96	67.31	34.63
1.75V/cell	1715	1270	1070	704.5	405.3	247.3	174.3	143.9	120.6	82.34	67.98	35.31
1.70V/cell	1884	1364	1122	709.4	408.9	249.1	175	145.3	122.1	83.02	68.65	35.99
1.65V/cell	1906	1401	1135	714.4	412.1	250.7	175.7	145.6	122.5	83.57	69.27	36.67
1.60V/cell	1944	1445	1153	723.3	413.1	252	175.7	145.8	122.8	83.97	69.71	37.32

All mentioned values are average values.


Discharge Characteristics Curve

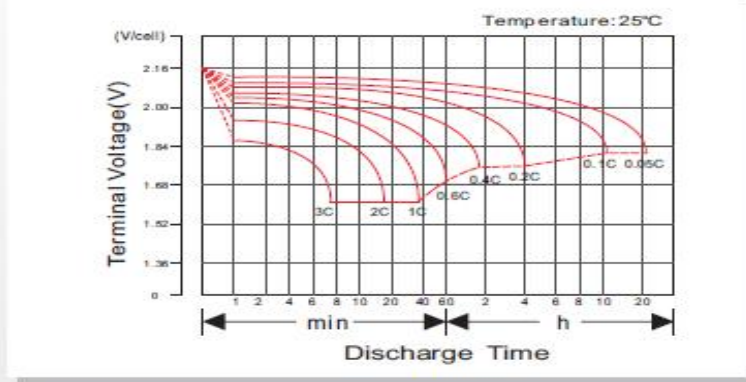


Charging Characteristics Curve

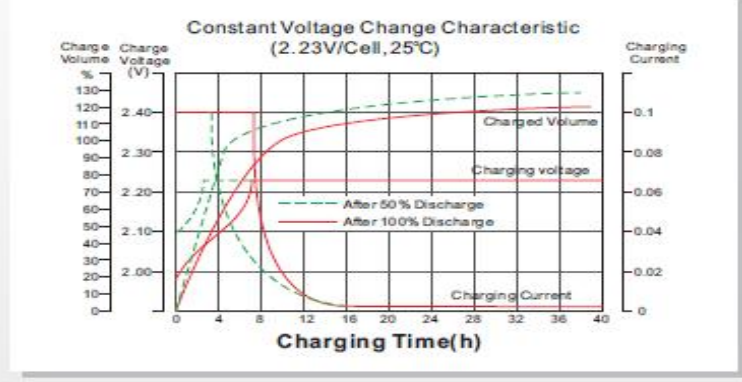


Cycle life in relation to depth of Discharge

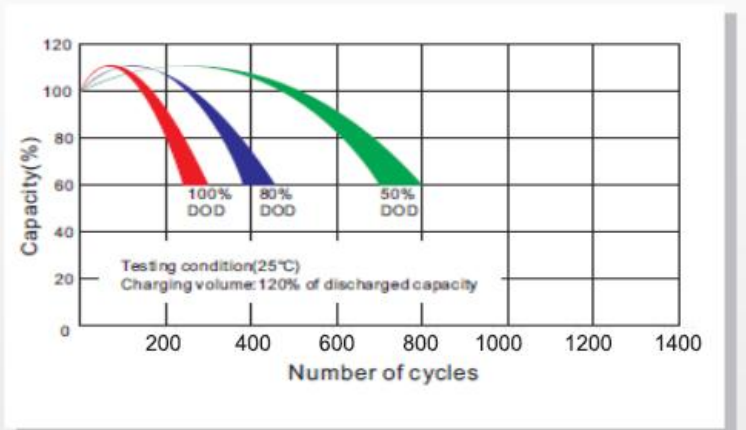


Temperature effects on Capacity

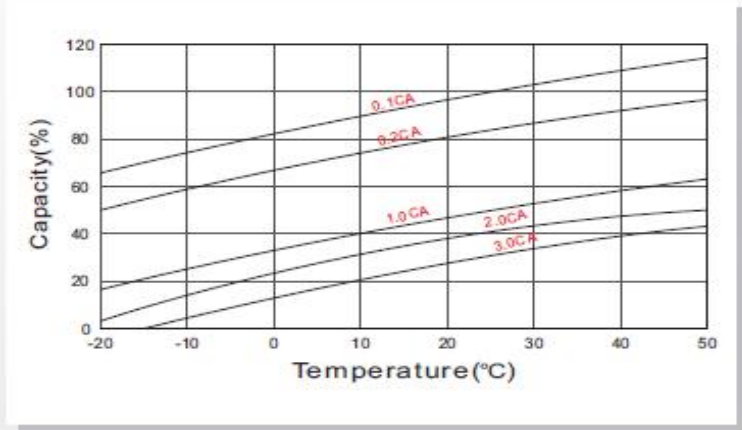


Relationship between charging voltage and temperature

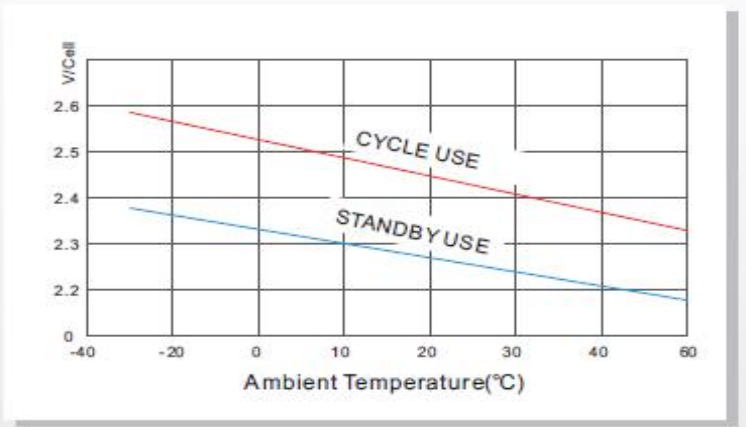


Self-discharge Characteristics

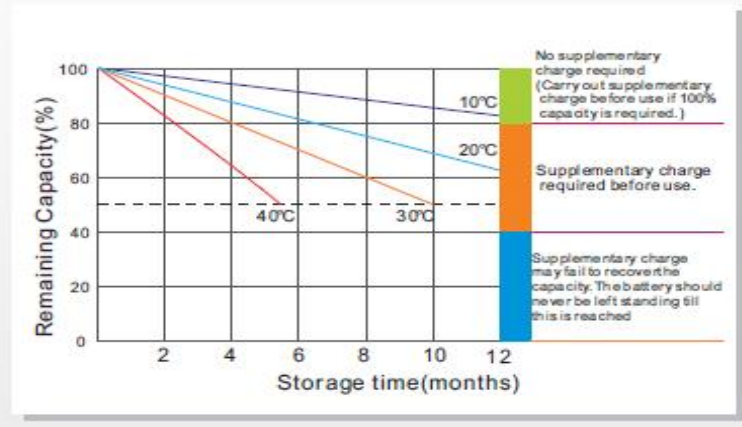

Temperature effects on Float life

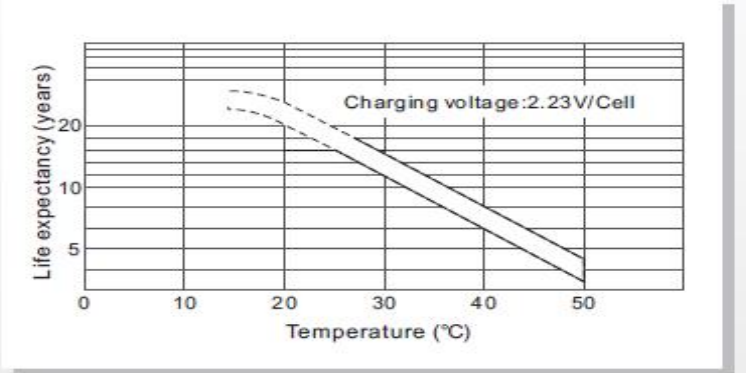

Life Characteristics of Standby use

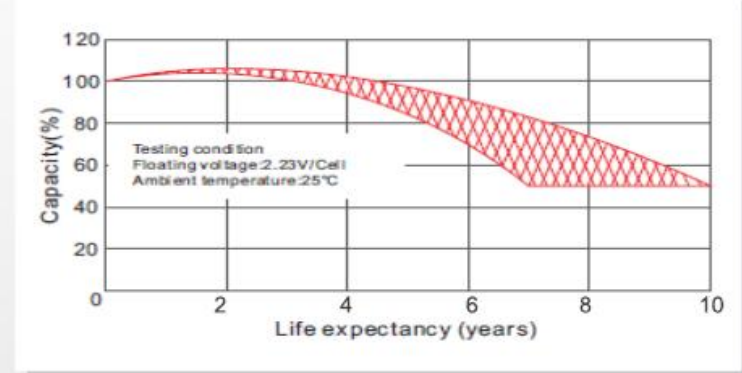

Maintenance & Cautions

- ※ Every month, recommend inspection every battery voltage;
- ※ Every three months, recommend equalization charge once;
Equalization charge method:
Discharge: 100% rate capacity discharge;
Charge: Max. Current 0.3CA, constant voltage 2.35-2.4V/Cell;
- ※ Effect of temperature on float charge voltage: -3mV/Cell;

CONTACT Us

Add: FL.2, No.12 North Ave.1, Industrial Rd. East, Gusan, Guzhen, Zhongshan, Guangdong, China,
T: +86-760- 8862 5562 | **F:** +86-760-8862 5562
Email: sales@holybattery.com johny5@126.com
Website: www.holybattery.com